



EHDMIC11-TR

IMPORTANT SAFETY INSTRUCTIONS

1. Do not unplug the device, when it is in using, keep distance from inflammable and explosive devices.
2. Power Supply: DC 5V, Use only the supplied power supply unit. Do not use the power supply if it is damaged.


I. Package Contents



1. HDMI Extender
Sender



2. HDMI Extender
Receiver




3. DC 5V/1A
Power Adapter
x2pc




4. User Manual

II. Features


1. Extends HDMI up to 100 meters for 1080p over one CAT5.
2. Follow the standard of IEEE-568B
3. Supports resolutions up to 1080p Full HD
4. Supports Ethernet bandwidth: 100M
5. HDCP compliant

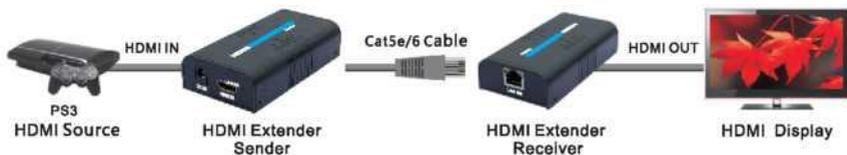

3. Router Connection

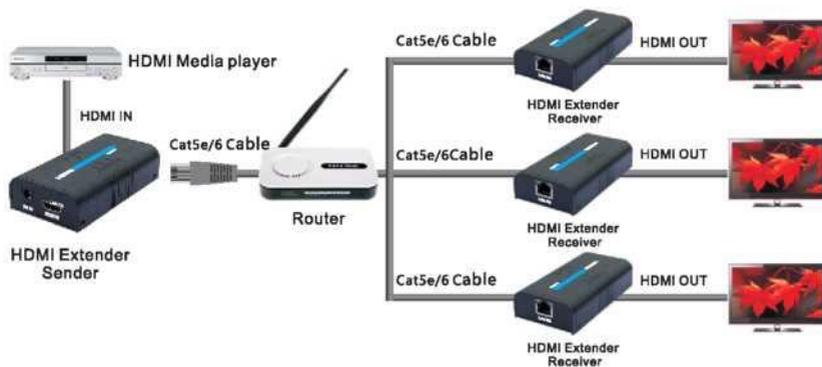

4. LAN Connection

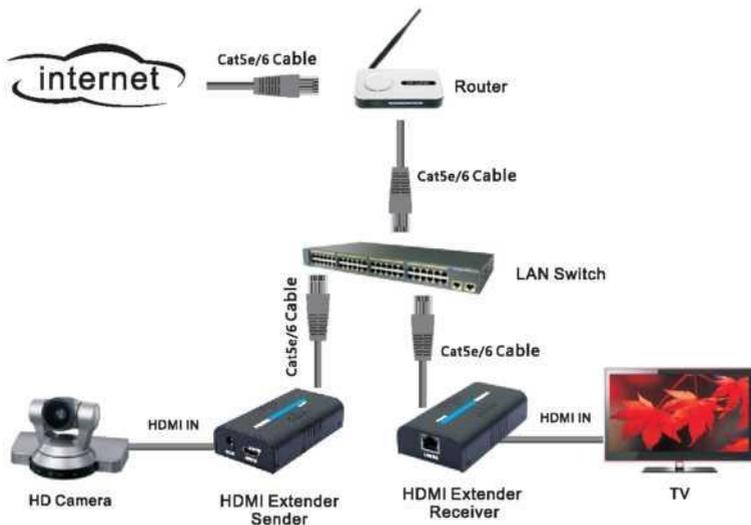

IV. FAQ

Q: Yellow light of Lan port is flashing but slowly!

- A: 1): Check whether HDMI Extender TX and HDMI Extender RX is reversed.
2): Check whether HDMI source device output HDMI signal correctly.
3): Change the HDMI cable of TX.

Q: Yellow light of Lan port is flashing quickly but no display?

- A: 1) : If HDMI source is graphics card, please set the resolution to be supported by display device.
2) : Check whether HDMI cable of RX Is well connected.
3) : Change the HDMI cable of RX.

Q: Yellow Led light of Lan port is not light?

- A: 1): Check connection of network cable.
2): Network cable is too long.

Q: Abnormal color display or flashing after all the devices are well connected.

- 1): Please press reset button of HDMI extender.
2): Follow the standard of IEEE-568B.

V. Technical Specifications

Power Supply	2x DC 5V/1A
Supports resolutions	480i@60Hz,480p@60Hz,576i@50Hz, 576p@50Hz,720p@50/60Hz,1080i@50/60Hz, 1080p@50/60Hz
Working Temperature	-10°C ~60 °C
Link Connector (Sender/Receiver)	UTP/STP CAT5e/6
Power Consumption	3W (max) each
Relative Humidity	20%~90%
Dimensions	110x58x26 mm
Weight	239 g