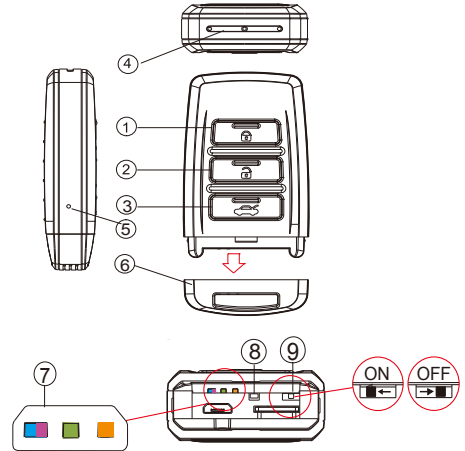
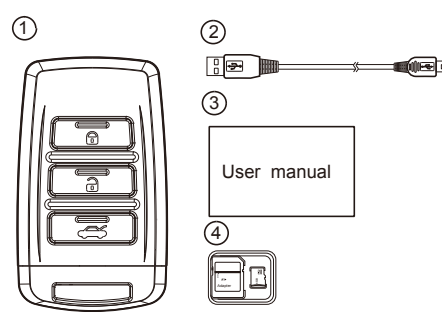
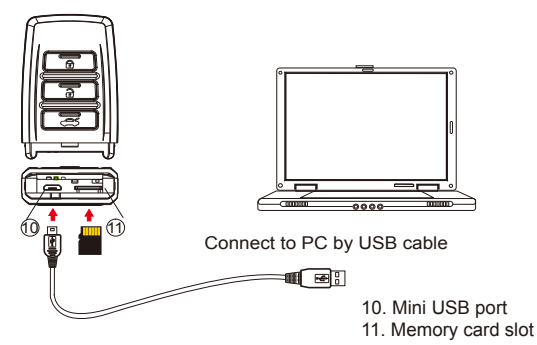
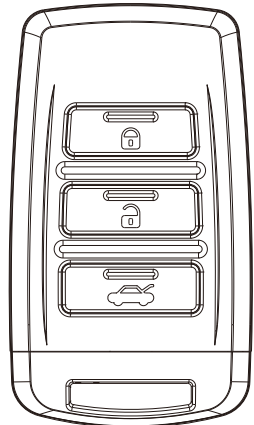


<div>1. Names and parts</div> <div></div> <div><div>1. Power on / Record button</div><div>2. Power off button</div><div>3. Wifi on / off button</div><div>4. 5MP Camera</div><div>5. Default button</div><div>6. Rear cover</div><div>7. LED indicators</div><div>Blue - power on</div><div>Purple - recording</div><div>Green - charging</div><div>Orange - Wi-fi</div><div>8. Reset Button</div><div>9. Vibration Switch</div></div>	<div>2. Package Content</div> <div></div> <div><div>1. Key fob camera</div><div>2. USB cable</div><div>3. User manual</div><div>4. Memory card</div></div>	<div>3. Charge the battery</div> <div></div> <div>Remove the rear cover , plug the micro USB end of cable into ⑩ and plug the other end into the computer or other USB power source.</div> <div><div>• Solid green LED - the device is charging.</div><div>• Green LED goes off - the device is full charged.</div></div>
---	---	--

<div>4. Format memory card</div> <div>4.1 With gold contact facing up, insert the memory card into ⑪</div> <div>4.2 Press ① to power on the device.</div> <div>4.3 Hold ② first, press ③ for one second, and release both at the same time.</div> <div><div>• Solid blue LED - the device is powered on.</div><div>• Purple LED blinks for five times - the memory card is being formatted.</div><div>• All lights off with one vibration - the formatting is completed.</div></div> <div>⚠ Caution: To make the memory card recognizable, please be sure to format the memory card before using it for the first time. Please note that formatting on computer is not recommended, for it might result in the failure for the computer to recognize the card.</div> <div>5. Date and time setting (for Windows system)</div> <div><div>1. From the desktop right-click to open Notepad, create a text file named <b>settime.txt</b></div><div>2. On the first line of the file, enter date and time information as year.month.day hours.minutes.seconds For example, suppose the time is October 16, 2015 15:00. Then enter <b>2015.10.16 15:00:00</b> <div>Note : There should be a space left between day and hours, and the time format should be the 24-hour format.</div></div><div>3. Save the file to the root directory of the memory card.</div><div>4. Insert the memory card into the slot, and power on the device. The date and time setting is now completed. <div>Note : When the date and time setting is completed. The <b>settime.txt</b> file will not be visible when you connect the device to the computer again.</div></div></div>	<div>6. Operation</div> <div>6-1 Power on: Press ① once.</div> <div>6-2 Recording: With device powered on, press ① again to start or stop recording.</div> <div>6-3 Vibration: Switch ⑨ to the left to turn off, or right to turn on.</div> <div>6-4 Wi-Fi: With device powered on, press ③ to turn on/off Wi-Fi.</div> <div>6-5 Power off: With no ongoing recording, press ②.</div> <div>6-6 Reset: When the device functions abnormally, press ⑧.</div> <div>6-7 Restore default Wi-Fi password: long press ⑤ for 3 seconds.</div> <div>6-8 Restore default setting : press ⑤ for 10 seconds.</div> <div>The device vibrates once, when you turn on/off the power, start recording, and turn on Wi-Fi. The device vibrates twice, when you turn off Wi-Fi.</div> <div><div>• Solid blue LED - power on</div><div>• Solid purple LED - recording on</div><div>• Blinking orange LED - searching for Wi-Fi connection</div><div>• Solid orange LED - device is connected to Wi-Fi</div></div> <div>7. Download videos and photos from DVR</div> <div>Knowing that all video files are stored in the memory card. You can ...</div> <div><div>1. Use a memory card reader to transfer data from the card to the computer.</div><div>2. Or, connect the device to the computer with memory card inserted. Turn on the device and it will work as a flash drive.</div></div>	<div>PV-RC200HDW</div> <div>1080p Key Fob Wi-Fi DVR</div> <div>User Manual</div> <div></div> <div>LawMate, innovation never stops</div> <div>LawMate®</div> <div>V1.0</div>
--	--	--