

Milesight All-in-one Video Surveillance Appliance


Milesight All-in-one Video Surveillance Appliance provides a systematic and professional solution with video input, storage, transfer and device management functions. It is pre-loaded with latest Windows-based Milesight VMS Enterprise system and 36 licenses to deliver a ready to deploy solution.



DATASHEET


KEY FEATURES

Accessibility	Client/Server, support 36 video streams per server.
Flexible & Scalable Storage	Support 6*12TB storage and expandable disk capacity.
Reliability	Support N+M Failover, Load Balancing and Secure Password .
High Data Availability	Freely form multi-server systems to achieve data concentration.
Versatile Interfaces	A whole array of ports provides all necessary features of effective surveillance.
Auto Power System	With hardware based power-on self-starting for care-free maintenance.
Powerful Decoding	1080P 400fps with H.264 Compression Technology.
Service Guarantee	3-year, keep your appliance warranty.
Compatibility	Fully integrate with Milesight network camera, sensors and 3rd party network cameras.
Green Energy Efficiency	Powered by low power consumption CPU to save energy.



Out-of-the-box ready solution& Fine-grained management

- Pre-configured latest VMS system is free to install and configure in minutes.
- Client/Server architecture achieves centralized resource management.
- Device, Recording, Users & Roles, Event & Alarm Management and other complex needs can be met by one system.



Reliability and Usability


- · Load Balancing delivers increased scalability and flexibility.
- N+M Failover ensures uninterrupted recording and boosts risk resistance.

Milesight All-in-one Video Surveillance Appliance



		VE0602-A
Devices	Included Camera Access License	36
Recording	Recording Schedule	36
Decoding	Video Format	MJPEG, H.264, H.265
	Decoding Resolution	Up to 12 MP
	Decoding Capability	H.264: 1920*1080 @400 fps H.265: 1920*1080 @200 fps
Event & Alarm	Event and Alarm Rules	1000
Users & Roles	Concurrent Accesses via Clients, App Clients	300
	Users	1000
	Roles	100
Local Viewing	Local Viewing	Supported
	Main Processor	2.0 GHz Intel Celeron Series
	Memory	2*4GB DDR4
	Network Interface	4*2.5 GbE RJ-45 ports
System	Operating System	Microsoft Windows 10 IoT Enterprise 64bit
	GPU Options	Integrated GPU
	Auto Power On	Support
Auxiliary Interface	HDD Drives (Video Data)	6*SATA (3.5" or 2.5")
	SSD Drive (Operating System)	2*M.2 SSD(1*256 GB Pre-installed)
	RAM	2*SO-DIMM DDR4 2666 Slot (2*4GB Pre-installed) Support Up to 16GB Support Dual-Channel Mode
	Capacity	Up to 12TB capacity for each disk
	Recording Storage Capacity	Up to 72TB raw
	LAN	4*2.5Gbps LAN
	PCI-E	1*PCI-E4 slot
	Display	1*HDMI Port 1*DP Port Maximum resolution of 4K 120Hz Support independent and synchronous display
	Internal I/O	1*Power Connector(ATX_PWR 24pin) 1*Power Connector(CPU_PWR 4pin) 1*CPU Fan 1*COM Connector (9pin) 1*Front Panel Connector
	Audio	1* HD Audio Connector
	USB Interface	Front panel: 2*USB 2.0 Rear panel: 2*USB 2.0, 2*USB 3.0

Milesight All-in-one Video Surveillance Appliance



Power Supply	AC 100-240V, 50-60Hz
Consumption	≤30W(without HDD)
Working Temperature	0°C to 35°C (32°F to 95°F)
Working Humidity	10% to 90% RH (no freezing and no condensation)

V1.0

Milesight All-in-one video surveillance appliance



Interfaces

VE0602-A



- 1. HDD Indicator
- 2. USB 2.0
- 3. Power Button & Running Light




- 1. USB 2.0
- 2. DP Port
- 3. USB 3.0
- 4. Power LED
- 5. HDMI Port

6. CLRCMOS Button

- 7. LAN 8. Audio
- 9. Power

Device Connection Topology

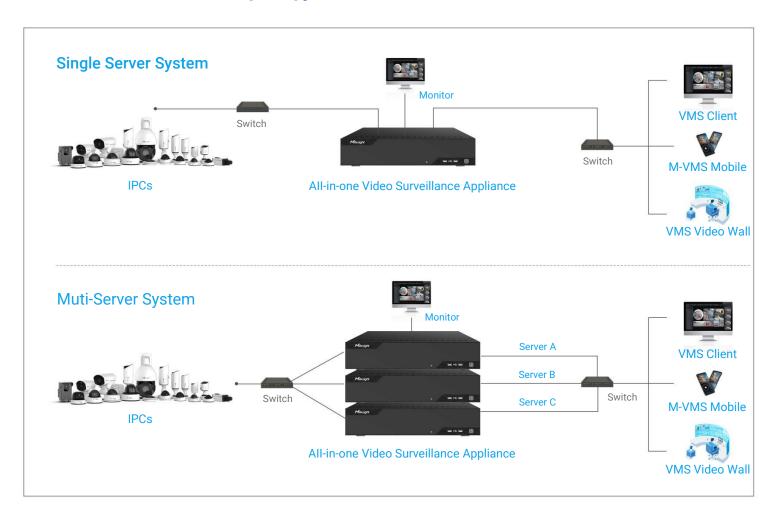



Contact Us: sales@milesight.com

support@milesight.com

